
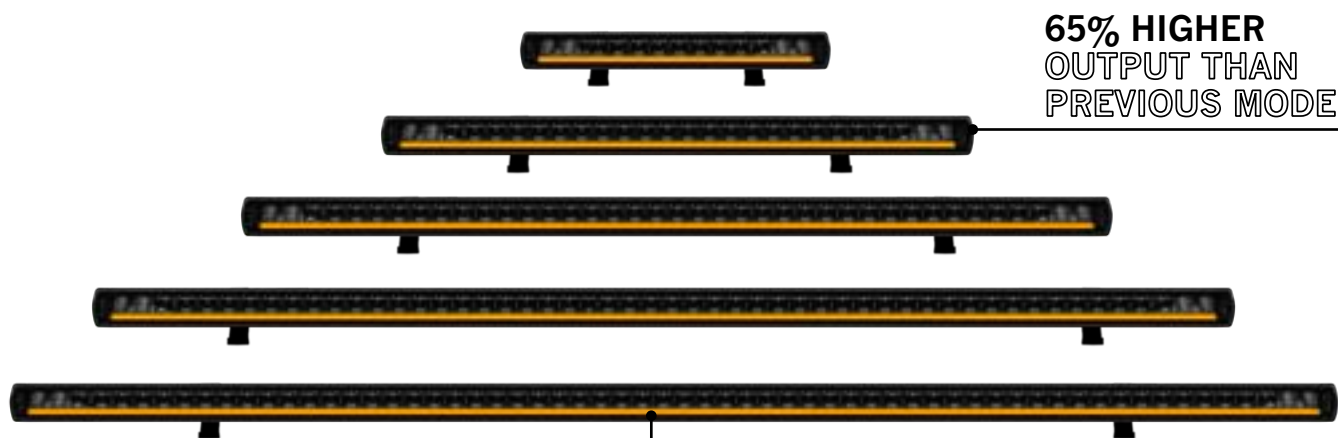
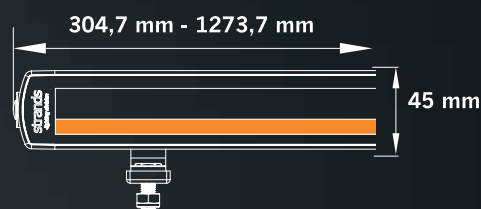


Part No. 809411A-809415A

# SIBERIA XPA SINGLE ROW LED BAR

- ✓ AMBER POSITION LIGHT
- ✓ UP TO 16 500 LUMEN
- ✓ 5 DIFFERENT SIZE 12-50 "



**65% HIGHER  
OUTPUT THAN  
PREVIOUS MODELS**


HELLO  
FUNCTION




| PART NO.                     | 809411A         | 809412A                 | 809413A                 | 809414A                 | 809415A                 |
|------------------------------|-----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| VOLTAGE                      | 10-32V DC       | 10-32V DC               | 10-32V DC               | 10-32V DC               | 10-32V DC               |
| CONSUMPTION, XPERIENCE-MODE  | 50W             | 102W                    | 160W                    | 239W                    | 240W                    |
| CONSUMPTION, E-MODE          | 25W             | 25W                     | 30W                     | 25W                     | 30W                     |
| CONSUMPTION WHITE AND AMBER  | 5,1W / 5,1W     | 9,2W / 92W              | 14,5W / 14,5W           | 19,1W / 19,1W           | 22,9W / 22,9W           |
| ACTUAL LUMEN, XPERIENCE-MODE | 3620 lm         | 7150 lm                 | 10 950 lm               | 14 760 lm               | 16 500 lm               |
| ACTUAL LUMEN, E-MODE         | 1725 lm         | 1875 lm                 | 1750 lm                 | 1500 lm                 | 1475 lm                 |
| 1 LUX @, XPERIENCE-MODE      | 454 m           | 602 m                   | 734 m                   | 858 m                   | 878 m                   |
| 1 LUX @, E-MODE              | 300 m           | 300 m                   | 300 m                   | 300 m                   | 300 m                   |
| COLOR TEMPERATURE            | 5700K           | 5700K                   | 5700K                   | 5700K                   | 5700K                   |
| BEAM PATTERN                 | Optimized beam  | Extended beam           | Long-distance beam      | Long-distance beam      | Long-distance beam      |
| IP-CLASS                     | IP68/IP69K      | IP68/IP69K              | IP68/IP69K              | IP68/IP69K              | IP68/IP69K              |
| COLOR LENS                   | Clear           | Clear                   | Clear                   | Clear                   | Clear                   |
| HELLO FUNCTION               | No              | Separate for pos. light | Separate for pos. light | Separate for pos. light | Separate for pos. light |
| POSITION LIGHT               | White and Amber | White and Amber         | White and Amber         | White and Amber         | White and Amber         |
| CONNECTION                   | DT-4PIN         | DT-4PIN                 | DT-4PIN                 | Cable                   | Cable                   |
| CABLE LENGTH                 | 550 mm          | 550 mm                  | 550 mm                  | 2500 mm                 | 2500 mm                 |
| MATERIAL HOUSING             | Aluminium       | Aluminium               | Aluminium               | Aluminium               | Aluminium               |
| MATERIAL LENS                | Polycarbonate   | Polycarbonate           | Polycarbonate           | Polycarbonate           | Polycarbonate           |
| LENGTH                       | 304,7 mm        | 555,6 mm                | 814,7 mm                | 1069,7 mm               | 1273,7 mm               |
| DEPTH                        | 55,5 mm         | 55,5 mm                 | 55,5 mm                 | 55,5 mm                 | 55,5 mm                 |
| HEIGHT                       | 45 mm           | 45 mm                   | 45 mm                   | 45 mm                   | 45 mm                   |
| HEIGHT INCLUDING BRACKET     | 64,5 mm         | 64,5 mm                 | 64,5 mm                 | 64,5 mm                 | 64,5 mm                 |
| OPERATING TEMPERATURE        | -35°C - +60°C   | -35°C - +60°C           | -35°C - +60°C           | -35°C - +60°C           | -35°C - +60°C           |
| E-APPROVED                   | ECE R148, R149  | ECE R148, R149          | ECE R148, R149          | ECE R148, R149          | ECE R148, R149          |
| REF                          | 20              | 20                      | 20                      | 20                      | 20                      |
| EMC-CERTIFICATE              | ECE R10         | ECE R10                 | ECE R10                 | ECE R10                 | ECE R10                 |

## PART NO. 809411A

### E-MODE

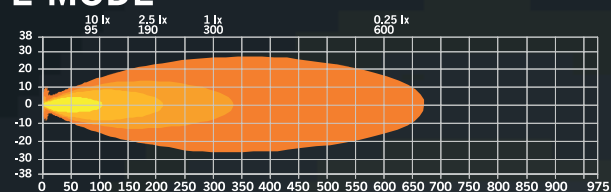


### XPERIENCE MODE

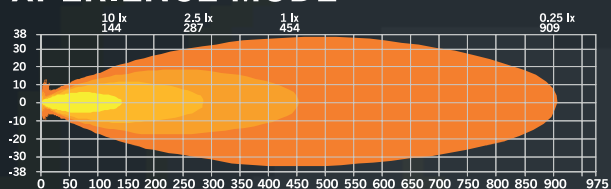


## PART NO. 809412A

### E-MODE

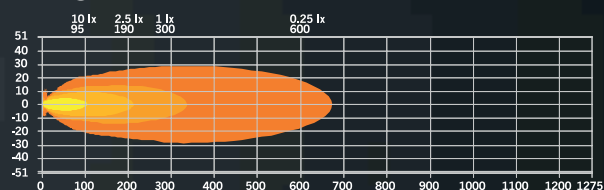


### XPERIENCE MODE

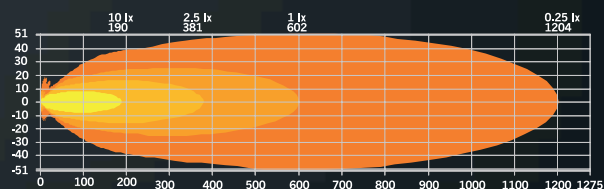


## PART NO. 809413A

### E-MODE

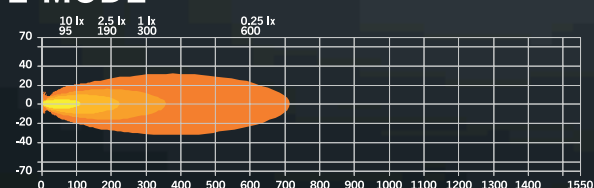


### XPERIENCE MODE

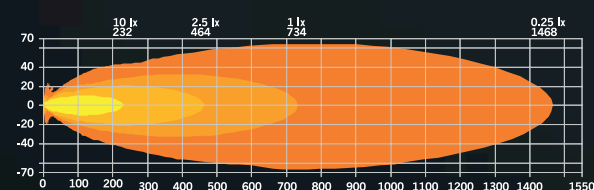


## PART NO. 809414A

### E-MODE

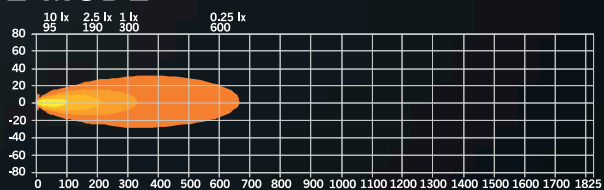


### XPERIENCE MODE

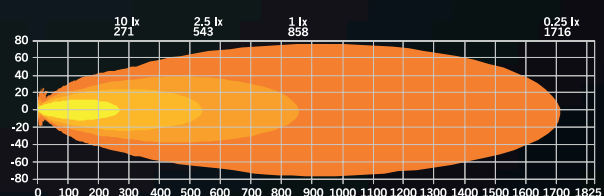

## PART NO. 809415A

### E-MODE

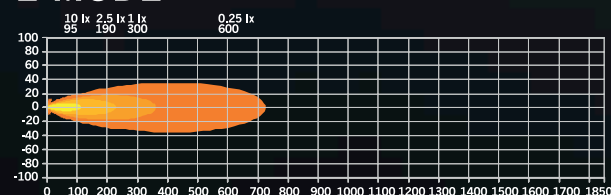

### XPERIENCE MODE

